


700 Series Three-Way Ball Valve

Design Considerations

The 700 Three-Way Ball Valve Series is designed to promote multiple configurations to fit the exact end use application. The 700 Three-Way Series can be used as a diverter, selecting or mixing valve, the bottom port is common. The standard handle has 180 degree rotation and lies over the open port. When the handle is rotated 90 degrees from either port, flow is shut off to both ports. The panel mount requires a .812 hole and is supplied with one Knurled and one Hex brass nut. The maximum panel thickness is .150. UL configurations are available and rated to 250 psi. UR configurations are available and rated to 500 psi.

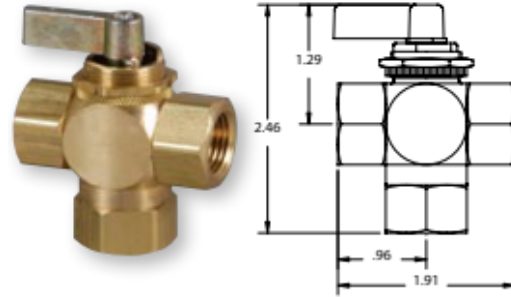

Configure your exact valve



SCAN ME

Specifications:

Maximum Operating Pressure — 500 psi	Maximum Operating Temperature — 180°F	Ball Through Hole Diameter — .375
Material Options	Brass Body and Ends, Nickel Plated Brass Ball, Teflon Seats, Stainless Handle Screw, Zinc Die Cast Flag Handle (Standard)	
Seal Options	Buna-N, Ethylene Propylene, Fluoroelastomer (Viton®), Neoprene	
Ball Options	180 Degree Handle Rotation with complete shut-off (Standard) T-Hole ball (all ports open or all ports shut-off)	
End Options	1/8, 1/4, 3/8, 1/2 Female NPT 3/8 Compression 1/4 Male Flare	
Plating Options	No Plating (Standard), Electroless Nickel	

Example of how to order:

Inlet End	Outlet End	Outlet End	Stem Seal	Ball	Plating
1/8 FNPT	1/4 FNPT	1/4 FNPT	Buna-N	180 Ball (Standard)	ENP

Part Number: 700-2F4F4F-B,ENP

The standard handle will lie over the open port when the valve is in the Full Open position. SMC Part Numbers are a description of the valve as read left to right, Inlet to Outlet to Outlet.

Example: 700-2F4F4F-B,ENP = 1/8 FNPT Inlet x 1/4 FNPT Outlet x 1/4 FNPT Outlet